



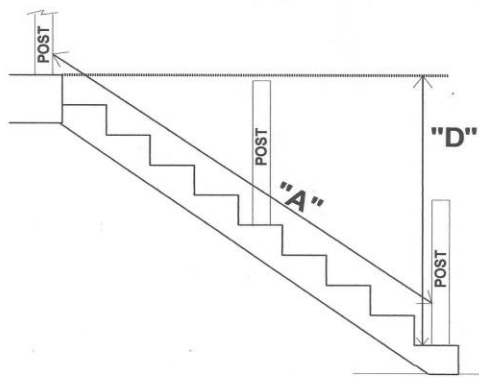

CUSTOM CURVED STAIR RAILING

Design "B" Order Form

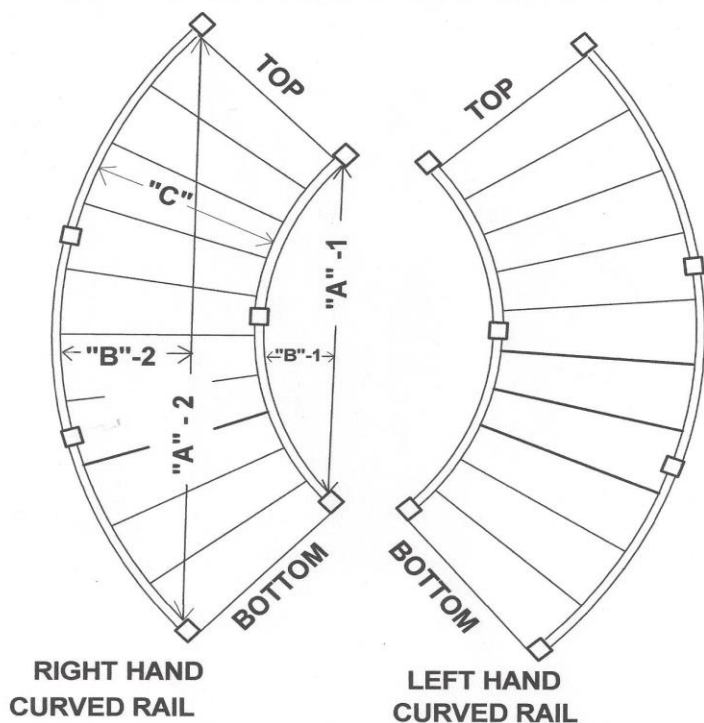

Date _____

Company _____

Contact Name _____

Phone _____

Job Name _____

INFORMATION NEEDED

	Rail Run Diagonal Line Inside of Rail	
"A" - 1	FT.	IN.
"A" - 2	FT.	IN.
	Rail Rise Inside of Rail	
"B" - 1	FT.	IN.
"B" - 2	FT.	IN.
	Distance between Rails	
"C"	FT.	IN.
	Total drop elevation from top of steps to bottom	
"D"	FT.	IN.
	Hand of Rail (check one)	
	Left	<input type="checkbox"/>
	Right	<input type="checkbox"/>

- Bugh, Inc. calculates the radius based on the measurements provided by the customer. By signing below you agree that Bugh, Inc. is only responsible for the calculations based on the measurements provided by customer on this form.

- If the distance between inside and outside rails ("C" measurement) is the same from top to bottom "A" - 2 and "B" - 2 measurements are not needed.

- Curved stair rails must also twist to keep them plumb from top to bottom of stairs. These measurements are needed to accomplish the proper twist.

Customer Signature _____

FT. _____ IN.

RADIUS

Date _____

Revised 7/17/15